



Fan coil unit with design cabinet, only 17 cm in depth and EC motor

FLAT S i 1 - 3 kW



EC motor



2 pipes systems



4 pipes systems



Vertical installation



Centrifugal fan

The solution tailored to design requirements of residential applications

Galletti's FLAT series now becomes SLIM. In fact, with a depth of only 17 cm, FLAT S ensures a compact size that makes it easy to integrate in any context, thus responding to the new design trends in the residential sector (and beyond).

The FLAT S mini series means innovation also in terms of engineering: it combines a guarantee of excellent low-noise performance with the advantage of an exclusive design that fits well with both residential and commercial settings.

The Galletti FLAT S i indoor hydronic units are equipped with a permanent magnet (brushless) electric motor, controlled by an inverter, which enables continuous adjustment in the number of fan revolutions.

In addition to the important reduction in electricity consumption compared to AC motors, the use of inverter EC technology makes it possible to continually adjust the operation of the unit to the actual thermo-hygrometric load of the interior, with a clear benefit in terms of comfort and reducing noise.

Its use is particularly effective in the frequent cases of operation under partial load conditions, the situation that occurs most frequently, when the adjustment logic allows greatly reduced motor rotation speeds with exceptional reductions in electricity consumption and noise emissions.

The operation of the unit with brushless motor is managed by EVO, MYCOMFORT LARGE or TED microprocessor control panel, using an analogue output (0-10 V) which is connected to the inverter.

PLUS

- » Cabinet with a refined design, depth 17 cm
- » Low energy consumption
- » Modulating operation
- » Microswitch on exit air flap
- » Reversible water connections
- » Inverter-controlled EC motor
- » ABS centrifugal fans



AVAILABLE VERSIONS



Suspended wall installation, with cabinet, with vertical air flow
2 and 4 pipes system

MAIN COMPONENTS

Cabinet

Design cabinet, RAL9010 colour, only 17 cm in depth, front panel made of sheet steel. Side panels and an upper grille with covers on either side manufactured from UV-stabilised ABS to maintain the colour intact over time. The upper grille consists of a flap and adjustable louvers. The flap features a microswitch that automatically shuts down the unit when the flap itself is closed.



Structure

Built from galvanised steel sheet of extra thickness, heat and sound insulated by means of Class 1 self-extinguishing panels.

Heat exchanger


High efficiency heat exchanger made with copper piping and aluminium fins, provided with brass manifolds and vent valve. The water connections are reversible at the time of installation. On request it is possible to mount an additional heat exchanger for 4-pipe systems.

Fans

Double suction centrifugal fans, statically and dynamically balanced, manufactured from anti-static ABS, with blades having an airfoil section and offset modules. The fans are housed in a low-noise ABS volute with high-efficiency profile.

Electric motor

The unit is equipped with an inverter board to control the motor, which can be used separately or installed on the motor itself. This system makes it possible to precisely set the maximum rotation speed of the motor (control signal 0-10 V) even when the maximum rotation speed must be controlled to reduce noise levels.



Air filter

Honey-comb polypropylene washable air filter, easily removable for maintenance operations.

ACCESSORIES

Electronic microprocessor control panels with display

DIST	MY COMFORT controller spacer for wall mounting
EVO-2-TOUCH	2.8" touch screen user interface for EVO control
EVOBOARD	Circuit board for EVO control
EVO DISP	User interface with display for EVO controller
EYNAVEL	Device for Wi-Fi or Bluetooth communication between EVOBOARD and smartphone
KBFLAE	MY COMFORT on-board installation KIT for FLAT
MCLE	Microprocessor control with display MY COMFORT LARGE
MCSUE	Humidity sensor for MY COMFORT (medium e large), EVO
MCSWE	Water sensor for MYCOMFORT and EVO controllers

Electronic microprocessor control panels

KB F	On-board FLAT/FLAT S installation kit suitable for TED controller
TED 10	Electronic controller for EC fan equipped with inverter and ON/OFF valves 230 V
TED SWA	Water temperature sensor for TED controls

Additional heat exchanger for 4-pipe systems

DF	1-row additional coil for 4 pipes system
-----------	--

Auxiliary water drip trays, insulating shell, condensate drainage pump

BV	Auxiliary water drip tray for vertical installation fan coil units
GIVKL	Insulating shell for VKS valve, water connections on the left
GIVKR	Insulating shell for VKS valve, water connections on the right

Base and enclosure elements

ZLS	Pair of base and enclosure elements for FLAT S
------------	--

Rear covering panels

PV	Rear painted panel for vertical installation with cabinet
-----------	---

Valves

KV	2-way valve, ON/OFF actuator, hydraulic kit on water connection side for main heat exchanger
KV24	2-way valve, ON/OFF actuator, 24 V power supply, hydraulic kit on water connection side for main heat exchanger
KV24DF	2-way valve, ON/OFF actuator, 24 V power supply, hydraulic kit on water connection side for main and additional heat exchanger

KVDF	2-way valve, ON/OFF actuator, 230 V power supply, hydraulic kit on water connection side for main and additional heat exchanger
KVM	2-way valve, MODULATING actuator, 24 V power supply, hydraulic kit on water connection side for main heat exchanger
KVMDF	2-way valve, MODULATING actuator, 24 V power supply, hydraulic kit on water connection side for main and additional heat exchanger
VKDF	3-way valve, ON/OFF actuator, 230 V power supply, complete hydraulic kit for additional heat exchanger
VKDF24	3-way valve, ON/OFF actuator, 24 V power supply, complete hydraulic kit for additional heat exchanger
VKDF24ND	3-way valve, ON/OFF actuator, 24 V power supply, hydraulic kit without holder, for additional heat exchanger
VKDFND	3-way valve, ON/OFF actuator, 230 V power supply, hydraulic kit without holder, for additional heat exchanger
VKMDF	3-way valve, MODULATING actuator, 24 V power supply, complete hydraulic kit for additional heat exchanger
VKMDFND	3-way valve, MODULATING actuator, 24 V power supply, hydraulic kit without holder, for additional heat exchanger
VKMS	3-way valve, MODULATING actuator, 24 V power supply, complete hydraulic kit for main heat exchanger
VKMSND	3-way valve, MODULATING actuator, 24 V power supply, hydraulic kit without holder, for main heat exchanger
VKS	3-way valve, ON/OFF actuator, 1230 V power supply, complete hydraulic kit for main heat exchanger
VKS24	3-way valve, ON/OFF actuator, 24 V power supply, complete hydraulic kit for main heat exchanger
VKS24ND	3-way valve, ON/OFF actuator, 24 V power supply, hydraulic kit without holder, for main heat exchanger
VKSND	3-way valve, ON/OFF actuator, 230 V power supply, hydraulic kit without holder, for main heat exchanger
VPIC	2-way valves pressure independent, ON/OFF actuator, 230 V power supply, hydraulic kit, for main heat exchanger



Fan coil FLAT S i

2 PIPES - RATED TECHNICAL DATA

FLAT S i			13			23			43		
Speed			min	med	max	min	med	max	min	med	max
Control voltage	(E)	V	4,80	5,80	7,70	4,50	5,80	7,90	5,10	6,30	8,00
Total cooling capacity	(1)(E)	kW	0,85	0,97	1,23	0,97	1,19	1,53	1,76	2,11	2,74
Sensible cooling capacity	(1)(E)	kW	0,60	0,69	0,88	0,74	0,93	1,20	1,26	1,52	1,99
FCEER class	(E)		D			B			B		
Water flow	(2)	l/h	148	168	213	168	230	300	303	368	477
Water pressure drop	(2)(E)	kPa	3	3	5	6	8	12	5	6	10
Heating capacity	(3)(E)	kW	0,88	1,01	1,27	1,00	1,22	1,54	1,85	2,19	2,83
FCCOP class	(E)		D			C			B		
Water flow	(3)	l/h	155	176	221	174	211	277	321	380	492
Water pressure drop	(3)(E)	kPa	2	3	4	5	8	11	4	6	9
Rated air flow		m³/h	115	135	170	135	170	225	250	310	420
Power input	(E)	W	11	13	16	9	10	14	10	12	21
Total sound power level	(4)(E)	dB(A)	30	35	40	35	40	46	37	42	49

(1) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) according to EN1397:2021

(2) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity)

(3) Water temperature 45°C / 40°C, air temperature 20°C

(4) Sound power measured according to standards ISO 3741 and ISO 3742

(E) EUROVENT certified data

Power supply 230-1-50 (V-ph-Hz)

4 PIPES - RATED TECHNICAL DATA

FLAT S i			13			23			43		
Speed			min	med	max	min	med	max	min	med	max
Control voltage	(E)	V	4,80	5,80	7,70	4,50	5,80	7,90	5,10	6,30	8,00
Total cooling capacity	(1)(E)	kW	0,85	0,97	1,23	1,08	1,33	1,74	1,75	2,12	2,75
Sensible cooling capacity	(1)(E)	kW	0,60	0,69	0,88	0,74	0,92	1,21	1,26	1,54	2,01
FCEER class	(E)					B					
Water flow	(2)	l/h	148	168	213	186	230	300	303	368	477
Water pressure drop	(2)(E)	kPa	3	3	5	4	7	11	5	7	10
Heating capacity	(3)(E)	kW	1,04	1,15	1,36	1,35	1,56	1,91	2,16	2,45	3,02
FCCOP class	(E)		C			B			B		
Water flow	(3)	l/h	91	100	119	118	136	167	189	215	264
Water pressure drop	(3)(E)	kPa	2	2	3	4	5	7	2	2	3
Rated air flow		m³/h	115	135	170	135	170	225	250	310	420
Power input	(E)	W	7	8	10	7	8	11	10	12	21
Total sound power level	(4)(E)	dB(A)	30	35	40	35	40	46	37	42	49

(1) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) according to EN1397:2021

(2) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity)

(3) Water temperature 65°C / 55°C, air temperature 20°C




(4) Sound power measured according to standards ISO 3741 and ISO 3742

(E) EUROVENT certified data

Power supply 230-1-50 (V-ph-Hz)

DIMENSIONAL DRAWINGS

FLAT Si

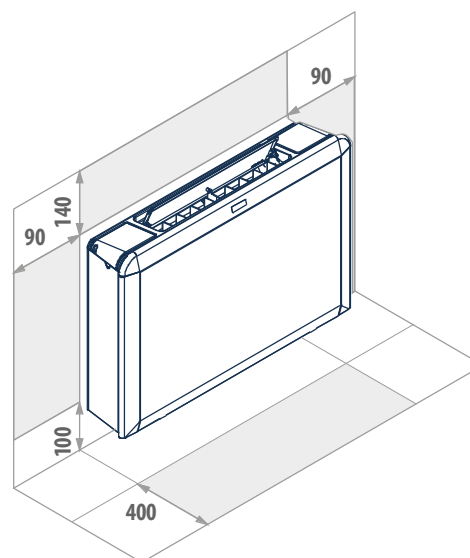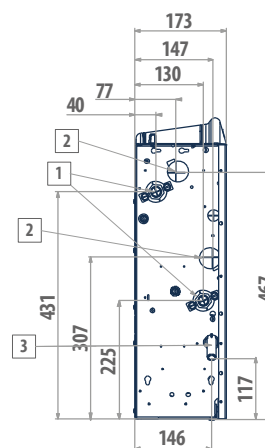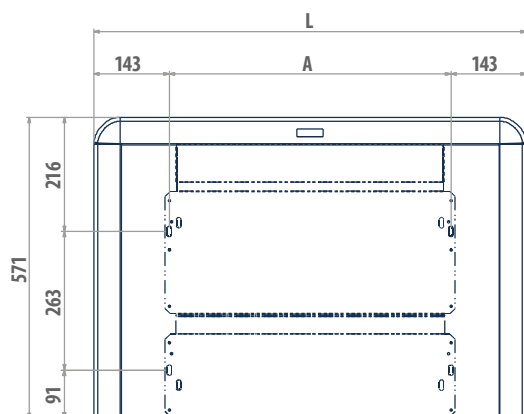

LEGEND

- 1** Water connections standard heat exchanger $\varnothing$ 1/2"
 - 2** DF 1-row additional heat exchanger water connections $\varnothing$ 1/2"
 - 3** Condensate discharge diameter for vertical installation $\varnothing$ 16 mm
- Condensate discharge diameter for horizontal installation $\varnothing$ 17 mm**

FLAT Si	A mm	L mm	kg
13	534	820	17
23	704	990	21
43	874	1160	23